
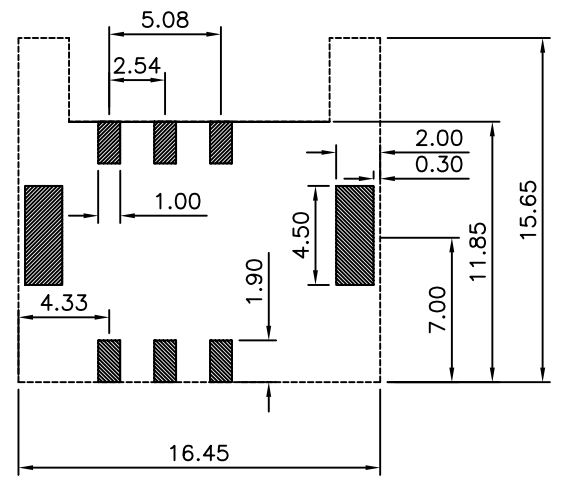
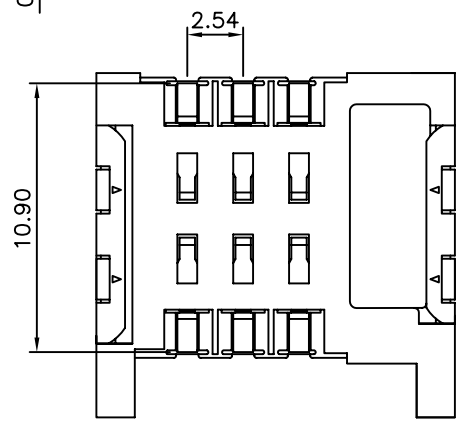


SPECIFICATIONS
 Current Rating: 1.0A Max.
 Dielectric Withstanding Voltage:
 500V AC R.M.S. For One Minute
 Insulation Resistance: 1000 Megohms Min.
 At 500V DC
 Contact Resistance: 30 Milliohms Max.
 Operating Temperature: -40°C To +85°C
 Housing: Hi-Temp Plastic (UL 94V-0), Black
 Terminal: Copper Alloy (t=0.15mm)
 Gold Plated Over Nickel
 Fork: Copper Alloy (t=0.20mm)
 Tin Plated Over Nickel

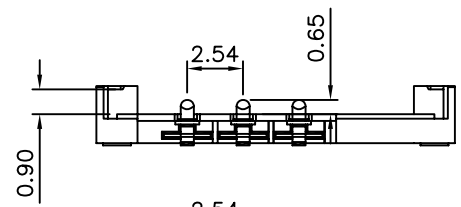

Recommended PCB Layout
 Tolerance ±0.05
 Top View

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 18134

APPROVED BY
 MEI
 CHECKED BY
 BECKY
 DRAWING BY
 TCF

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±3°
 UNIT
 mm

SCALE NONE

REV. A0

NO.	REV.	DESCRIPTION	CHK	DATE
△ A0		NEW RELEASE	BECKY	2004/09/29
		REVISIONS		